

THE INDUSTRY'S BEST WRITTEN GUARANTEE*




Top Performing Triple-Biocide Antifouling



Colorkote™

- ▶ Triple Biocide Antifouling Power – Econeal*, Zinc Omadine, Copper Thiocyanate
- ▶ Vibrant Colors – 6 Basic Colors can be mixed to create thousands of custom colors
- ▶ Multi-season performance in fresh, brackish and saltwater conditions
- ▶ California Air Quality Compliant – 330 Grams per liter VOC
- ▶ Compatible with all hull types – ideal for fiberglass, aluminum, and steel/iron hulls

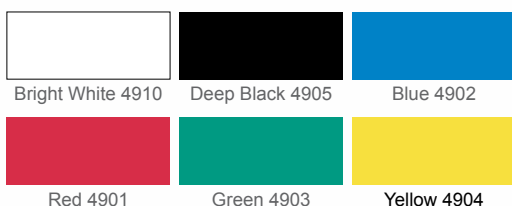


Top Performing Dual-Biocide Antifouling



Biocop TF™

- ▶ Advanced dual biocide PL3 technology
 - ▶ Maximum protection available for fresh, brackish and saltwater
 - ▶ Multi-season protection
 - ▶ 38.06% Cuprous Oxide
 - ▶ 4.14% Zinc Omadine
 - ▶ Lloyd's Register certified
- Compare with: Micron 66**

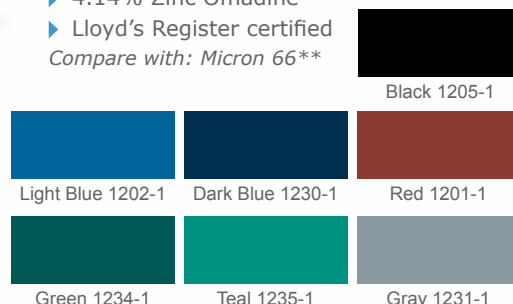

Bold Colors Block Barnacles

With Colorkote, 46,656 custom colors are possible by blending the 6 base colors above in various ratios.



One Easy Step to Reduce Slime!



Add a pint of Biocop TF to these Sea Hawk copper-based paints for DUAL-BIOCIDES Protection



= Biocop TF Slime-Reducing Additive Compatible




BOTTOM PAINT BUYING GUIDE

Islands Dual-Biocide Antifouling




Islands 44 TF™

- ▶ Applies directly over tin-based paints
- ▶ Tin-free multi-season performance
- ▶ Highest grade of cuprous oxide available keeps barnacles away
- ▶ 32.7% Cuprous Oxide
- ▶ Ecomea biocide fights both hard and soft growth

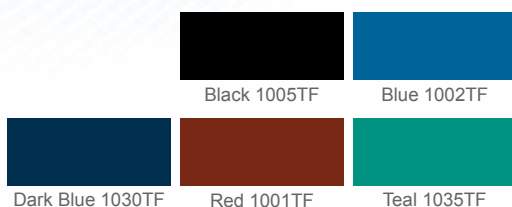

Islands 77 Plus™

- ▶ Dual-Biocide
- ▶ Highest Grade of Cuprous Oxide and Zinc Omadine Available
- ▶ Tin-Free Multi-Season Performance
- ▶ Consistent viscosity - better flow & rollability
- ▶ Harder self-polishing polymer binding system

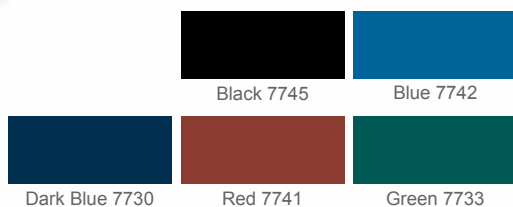

Self-Polishing Copolymer Antifouling



Cukote™


- ▶ Semi-hard, self-polishing ablative finish
- ▶ Multi-season protection
- ▶ 47.57% Cuprous Oxide
- ▶ Lloyd's Register certified

Compare with: Micron CSC**

Now available
330 G/L VOC
formulation



Boost with
Biocop TF

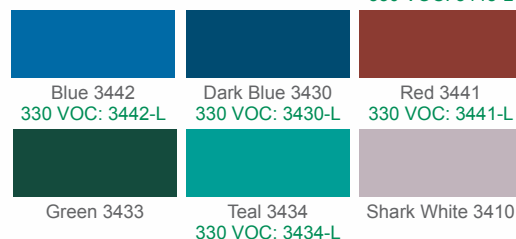


AF33™

- ▶ Harder, self-polishing ablative finish
- ▶ Exceptional value multi-season coating
- ▶ 33.6% Cuprous Oxide - highest grade available
- ▶ Consistent viscosity providing better flow and rolling ability
- ▶ Lloyd's Register certified

Compare with: ACT**, Micron CSC**



Boost with
Biocop TF

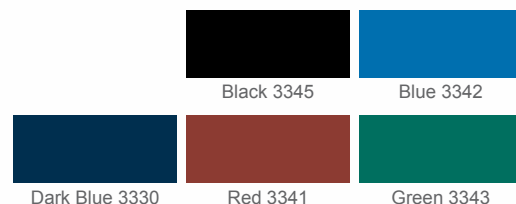


Water-Based Antifouling



Monterey™

- ▶ Water-based semi-hard ablative finish
- ▶ Environmentally safe - low VOC's
- ▶ 54.67% Cuprous Oxide - highest grade available

Compare with:
Hydrocoat*,
Aqua**

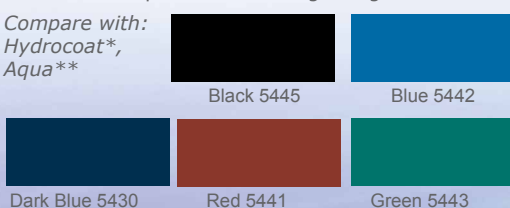


Copper-Free Water-Based Antifouling



Mission Bay CSF™


- ▶ Water-based self-polishing ablative
- ▶ High-performance eco-friendly antifoulant
- ▶ Over 80% lower VOC's than solvent-based antifoulants
- ▶ No barrier coat needed over most antifouling paints
- ▶ 4.02% Zinc Omadine
- ▶ Ideal for all types of vessels



OVER 40 YEARS


Hand Crafted in America!™

Hard Modified Epoxy Antifouling



Tropikote™

- ▶ Hard, modified epoxy antifouling
- ▶ Protection in extreme tropical conditions
- ▶ 75.8% Cuprous Oxide (Highest in the Industry)




Compare with: Trinidad*, Ultra**



Sharkskin™

- ▶ High performance hard modified epoxy
- ▶ 45.2% Cuprous Oxide
- ▶ Consistent viscosity - better flow & rolling ability




Compare with: Ultra**, Professional Coatings*, Unepoxy*, Z Spar Protector*

Semi-Hard Hybrid Ablative Antifouling



Talon™

- ▶ Value-priced
- ▶ 33.6% Cuprous Oxide
- ▶ Consistent viscosity, better flow & rollability



Compare with: HRT Unepoxy*, Fiberglass Bottomkote NT*

Copper-Free Antifouling



Smart Solution™


- ▶ Metal-free self-polishing ablative antifoulant
- ▶ Environmentally safe
- ▶ Compatible over most existing antifoulants

ECONEA
The ECONEA trade name and logo are registered trademarks of Janssen PMP, a division of Janssen Pharmaceutica, NV, Beerse, Belgium

- ▶ Ecomea
- ▶ Lloyd's Register certified

Now Available in Pints for Outdrives

Compare with: Pacifica Plus*, Ultima Eco*

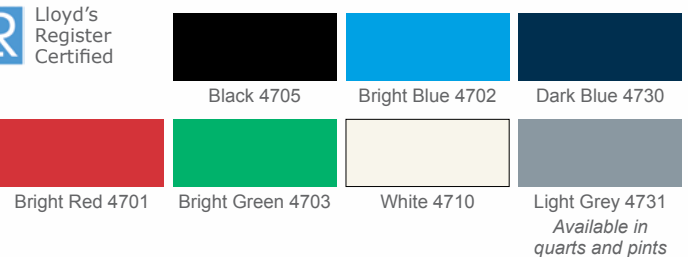


Mission Bay™

- ▶ Self-polishing ablative; no barrier coat needed over most antifouling paint
- ▶ Environmentally-friendly, non-metal biocide
- ▶ Helps prevent electrolysis
- ▶ 3.8% Zinc Omadine
- ▶ Lloyd's Register certified



Also available in 4500 series water-based formula

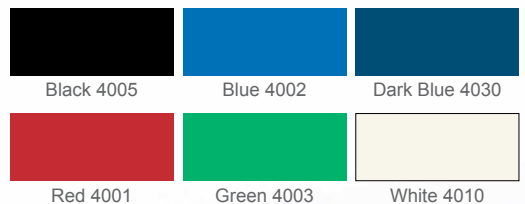

Aerosol Sprays



Smart Solution™ Antifouling Spray

- ▶ Ideal for outboards, outdrives and propellers
- ▶ Metal-free, will not cause galvanic corrosion
- ▶ Environmentally safe

16 oz.
(33% more than 12 oz.)



Black 4705A



Barnacle Blocker™ Spray Primer

- ▶ Self-cleaning anti-corrosive primer
- ▶ Use on underwater metals including steel, cast iron, copper, bronze, lead and aluminum
- ▶ Reduces galvanic corrosion
- ▶ Zinc-free aerosol spray

12 oz.




Gray 505A



1241 2K Epoxy Spray Primer

- ▶ Hard-as-nails, 2-component, marine grade epoxy primer
- ▶ Easy convenient application for hard-to-reach areas
- ▶ Surface tolerant - apply directly over flash rust
- ▶ Ideal for thrusters and outdrives

13.2 oz.



Gray 1241A



Aluminum Boat Paint



Aluma Hawk™

- ▶ Ideal for pontoons, jon boats & house boats
- ▶ Rust-inhibiting
- ▶ Topcoat and/or primer on raw aluminum, fiberglass & other substrates
- ▶ Safe for fresh or saltwater submersion



Black
AH7005



Jon Boat Blue
AH7002



Jon Boat Green
AH7033



Aluminum Gray
AH7031



Jon Boat Tan
AH7050



White
AH7010

Surface Tolerant Epoxy Coating



1241 Base and
Catalysts sold
separately

1241 Surface Tolerant Epoxy Coating System™

- ▶ Surface tolerant formulation, reduces surface preparation time and cost
- ▶ Low temperature cure expands application window (to 0°F, -18°C)
- ▶ Quick drying provides fast re-coating
- ▶ Low VOC formulation complies with rigid VOC limits
- ▶ Ideal for steel and aluminum hulls



Gray 1241

Catalyst selection:

- 1241C Catalyst
- 1241CS Slow Cure Catalyst

High Build Epoxy Primer Systems



Tuff Stuff™

- ▶ Highest build epoxy primer
- ▶ Low odor during application
- ▶ All-in-one osmosis protection
- ▶ 1:1 two-part ratio for easy mixing

Compare with: Interprotect**,
Pettit Protect 4700*



Gray 1284



White 1285

Available in 2-gal kit or 1/2-gal kit.



Tuff Stuff™ Low VOC

- ▶ Highest build low VOC epoxy primer
- ▶ Complies with strict California Air Quality VOC limits
- ▶ Low VOC's (280 grams/liter)
- ▶ 1:1 two-part ratio for easy mixing

Compare with: Interprotect**,
Pettit Protect 4700*



Gray 1286



White 1287

Available in 1-gal kit

Primer Systems



1277 Bottom Paint Primer™

- ▶ Anti-corrosive bottom paint primer
- ▶ Ideal for priming any unknown antifoulant
- ▶ Indefinite overcoat window

Compare with: Primocon**, Tie Coat 6627*



1266 Non Sanding Primer™

Designed for use on new fiberglass hulls when sanding is prohibited by the manufacturer. 1266 softens existing gelcoat to create an adequate chemical bond.



S-75 & S-75-C Alumi-Chrome

Alumi-Chrome is a zinc chromate vinyl butyral washcoat (sometimes referred to as a wash primer) used as a pretreatment for aluminum hulls prior to primer and antifouling application.



SH-984 Shawkocon™

- ▶ Conversion/barrier/sealer coating over tin-based antifoulings and unknown well-adhered antifoulant
- ▶ Excellent barrier coat for underwater metals

Compare with: Primocon**, Tie Coat 6627*



1255 Black Barrier Coat

1255 provides heavy duty exposure protection above and below the waterline on most substrates. Meets or exceeds requirements of the Corp. of Engineers Specification C-200 and other specs.



S-76 Tack Coat Primer

S-76 is an anti-corrosive strontium chromate-based primer designed for underwater metal surfaces, including metal hulls and running gear. S-76 should be used in conjunction with another primer, such as Tuff Stuff, prior to applying antifoulant or topcoat.

OVER **40** YEARS
Hand Crafted in *America!*SM



Epoxy Resin System

Hawk Epoxy



Hawk Epoxy Base Resin

Premium quality, marine-grade epoxy resin used for general fiberglass repair and construction with superior adhesion strength, bonding, filling and moisture barrier.

Available in Quart (Size 1), Gallon (Size 2) & 5-Gallon (Size 3)

Hawk Epoxy Catalysts

C1 Ultra Slow Cure Catalyst - Very slow cure speed at room temperature. 3:1 ratio R1 Resin to C1.

Available in .66-Pint (Size 1), .33-Gallon (Size 2) & 1.45-Gallon (Size 3)

C2 Slow Cure Catalyst - Slow cure speed. Compatible with higher temperatures. 5:1 ratio R1 Resin to C2.

Available in .4-Pint (Size 1), .8-Quart (Size 2) & .87-Gallon (Size 3)

C3 Fast Cure Catalyst - Fast cure speed. Compatible with cooler temperatures. 5:1 ratio R1 Resin to C3.

Available in .4-Pint (Size 1), .8-Quart (Size 2) & .87-Gallon (Size 3)

C5 Clear Finish Catalyst - Cures to a very clear finish. Longer cure time in warmer temperatures. 3:1 ratio R1 Resin to C5.

Available in .66-Pint (Size 1), .33-Gallon (Size 2) & 1.45-Gallon (Size 3)

Hawk Epoxy Fillers

F1 High Load Adhesive Fiber Filler

F2 Structural Adhesive Filler

F3 Light Density Adhesive Micro Fiber Filler

F4 Bridging Adhesive Filler

F5 Light Density Fairing Filler

F6 MicroSphere Fairing Filler

Hawk Epoxy Pump Kits

Attaches directly to the resin and catalyst containers. Calibrated to yield the perfect mix ratio with one full pump stroke for both the resin and the catalyst.

Kit 30-KT for sizes 1 & 2. Kit 30-KT-S3 for size 3.

Klear Kote™ Table Top Resin

- ▶ Marine-grade, two-part epoxy system specifically for coating table tops, furniture and works of art that cures to a clear, glass-like surface
- ▶ Resists moisture, scratching and yellowing
- ▶ Exceptional self-leveling properties

Reducers & Solvents



2031 Islands 44 Reducer
2033 Reducer (General Purpose)
2035 Reducer (Above 85°)
2044 Epoxy Reducer
2053 VOC-Exempt Reducer
2084 Tuff Stuff Reducer
7100 Mineral Spirits
7105 Denatured Alcohol
7110 Lacquer Thinner
7115 Toluene
7120 Acetone
7125 Methyl Ethyl Ketone
7135 VM&P Naptha
7130 Xylene
S-80 Wax 'N' Grease Killer

Specialty Products



1280 Marine Paint Stripper

- ▶ Removes most types of marine paint and varnishes
- ▶ Biodegradable, nonflammable, low odor, environmentally safe formula



S-90 Low VOC De-Waxing Etch & Cleaner

- ▶ Removes tough surface contaminants
- ▶ Water-based and biodegradable



Polyurethane Foam

- ▶ Provides excellent insulation, flotation and bonding
- ▶ Impervious to solvents and gasoline



OVER **40** YEARS
Hand Crafted in *America!*SM

Compatibility Chart

Last modified:
May 2020

Previous	ACT** Aquadguard Aqua One** Black Widow* Fiberglass Bottomkote Aqua** HRT Eco* AF 33 BIOCOP TF COLORKOTE CUKOTE	HRT Neptune* HRT Premium* Hydrocoat, SR, Eco* Micron Navigator** Micron: WA, Extra, 66, CSC, CSC HS, CF** CUKOTE 330 ISLANDS 44 TF ISLANDS 77 PLUS ISLANDS 99 PLUS MISSION BAY	Pacifica® Plus, Odyssey HD* Ultima, SR, SSA, Eco* Vivid* Trilux 33 Aerosol** MONTEREY MISSION BAY CSF SMART SOLUTION TALON	Fiberglass Bottomkote NT** Protector* Trinidad (All)* Ultra** Unepoxy HRT* SHARKSKIN TROPIKOTE TROPIKOTE BIOCID PLUS
New				
Antifouling				
Top-Performing Triple Biocide				
COLORKOTE				
Top-Performing Dual Biocide				
BIOCOP TF ISLANDS 77 PLUS ISLANDS 44 TF				
Self-Polishing/Ablative				
CUKOTE CUKOTE 330 VOC AF 33 ISLANDS 99 PLUS TALON				
Hard Modified Epoxy				
TROPIKOTE SHARKSKIN				
Water-Based				
MONTEREY MISSION BAY CSF				
Copper-Free				
SMART SOLUTION MISSION BAY				

Boat Length (Feet)	Per Coat
20-25	3 Quarts
25-30	1 Gallon
30-32	1 Gallon + 1 Quart
33-37	1 Gallon + 2 Quarts
38-40	1 Gallon + 3 Quarts
41-42	2 Gallons
43-44	2 Gallons + 1 Quart
45-46	2 Gallons + 2 Quarts
47-49	2 Gallons + 3 Quarts
50-52	3 Gallons
53-55	3 Gallons + 1 Quart
56-59	3 Gallons + 2 Quarts

* Amounts are estimates and may vary by boat and bottom paint applied. Please see product technical data sheets for exact coverage.

Download Technical and
Safety Data Sheets at:
www.SeaHawkPaints.com/sdss-tdss

Compatibility Chart Legend:



= Lightly sand and apply paint



= Heavily sand and apply paint

* Products noted as such are registered Trademarks of, or sold by Pettit (KopCoat), and or RPM International, Inc.

** Products noted as such are registered Trademarks of, or sold by Interlux, and or Akzo Nobel.

Follow us on Facebook
[Facebook.com/seahawkpaints](https://www.facebook.com/seahawkpaints)



NEW NAUTICAL COATINGS, INC.
14805 49th Street North • Clearwater, Florida 33762
800.528.0997 U.S.A. Only • 727.523.8053 International • Fax 727.523.7325
Email: ContactUs@SeaHawkPaints.com

www.SeaHawkPaints.com

Sea Hawk
PREMIUM YACHT FINISHES

